

shorehire.

Pipeline Testing




Pipeline Test Plugs



Test Plugs



Blank Plugs

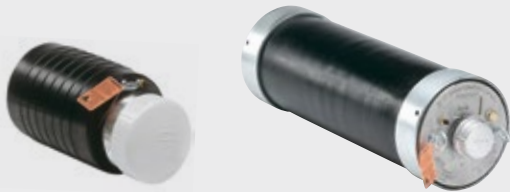

By-pass Plugs

Large range of Test Plugs available. Various sizes to suit most applications.

Shore Hire offer a wide range of Pneumatic Test Plugs designed for various applications including leak locating, bypassing, flow control or pipeline testing methods using water, air or vacuum. Our plugs have been designed for ruggedness, durability and flexibility, while being easy to use. Our Test Plugs serve multiple applications such as gravity bypassing or bypass pumping, but can also be used as a blank plug or standard testing plug.

Pipeline Testing Equipment

- Low pressure test plugs
- Multi-size plugs
- Muni-ball test plugs
- Gravity bypass
- Leak locator plugs
- Pump over bypass
- Single size bypass plugs



Blank Test Plugs



Simple and easy to blank off most pipes

Pipe Testing Plugs are designed for applications including low pressure testing, blocking of residential pipe systems, repair maintenance, installation of municipal infrastructure including storm and sanitary sewer piping systems.

100 SERIES: BLANK PNEUMATIC PLUGS

Size Range	Diameter	Length	Weight	Required Inflation Pressure		Max Allowable Back Pressure			
						Air		Water	
				psi	bar	psi	bar	ft	m
3.5"-4.5" 90-125mm	3.5" 90mm	5.5" 140mm	0.67kg	25	1.7	10	0.69	25	7.6
5.0"-6.5" 125-175mm	5.0" 125mm	6.0" 152mm	1.4kg	25	1.7	10	0.69	25	7.6
7.0"-8.5" 175-225mm	7.0" 175mm	7.5" 191mm	2.3kg	25	1.7	10	0.69	25	7.6
8.5"-10.0" 225-265mm	8.0" 200mm	10.0" 254mm	3.6kg	20	1.4	10	0.69	25	7.6
11.0"-12.5" 275-325mm	11.0" 275mm	12.0" 305mm	5.6kg	20	1.4	10	0.69	25	7.6
13.5"-15.5" 350-400mm	13.5" 350mm	15.0" 381mm	10.9kg	25	1.7	10	0.69	25	7.6
16.5"-18.5" 425-470mm	16.5" 425mm	18.0" 457mm	15.5kg	25	1.7	10	0.69	25	7.6
18.5"-21.5" 475-550mm	18.5" 475mm	21.0" 533mm	19.1kg	20	1.4	8	0.55	20	6.1

Multi-Size Bypass Pipe Test Plugs

400 SERIES: MULTI-SIZE BYPASS PLUGS

Size Range	Diameter	Length	Weight	Bypass Size	Required Inflation Pressure	Pipe Size		Max Allowable Back Pressure			
								Air		Water	
						Inch	mm	psi	bar	ft	m
4.0"-8.0" 100-200mm	3.8" 97mm	22.0" 559mm	7.0lbs 3.2kg	2.0" 51mm	40psi 2.8bar	4.0	100	15	1.0	45	13.7
						6.0	150	15	1.0	40	12.2
						8.0	200	15	1.0	35	10.7
5.5"-10.5" 150-275mm	5.5" 140mm	22.0" 559mm	13.0lbs 5.9kg	3.0" 76mm	40psi 2.8bar	6.0	150	15	1.0	45	13.7
						8.0	200	15	1.0	40	12.2
						10.0	250	15	1.0	35	10.7
7.0"-12.5" 175-325mm	6.5" 165mm	22.0" 559mm	18.0lbs 8.2kg	4.0" 102mm	40psi 2.8bar	8.0	200	15	1.0	45	13.7
						10.0	250	15	1.0	40	12.2
						12.0	250	10	0.7	35	10.7
9.0"-16.0" 225-400mm	8.5" 216mm	22.0" 559mm	26.0lbs 11.8kg	6.0" 152mm	40psi 2.8bar	10.0	250	15	1.0	45	13.7
						12.0	300	15	1.0	45	13.7
						16.0	400	10	0.7	35	10.7
10.5"-18.0" 275-450mm	10.0" 254mm	22.0" 559mm	34.0lbs 15.4kg	6.0" 152mm	40psi 2.8bar	12.0	300	15	1.0	40	12.2
						15.0	375	15	1.0	35	10.7
						18.0	450	10	0.7	30	9.1
14.0"-21.0" 350-550mm	13.5" 343mm	24.0" 610mm	46.0lbs 20.9kg	6.0" 152mm	40psi 2.8bar	15.0	375	15	1.0	40	12.2
						18.0	450	15	1.0	35	10.7
						21.0	525	10	0.7	30	9.1
16.5"-24.0" 425-625mm	16.0" 406mm	24.5" 622mm	60.0lbs 27.2kg	6.0" 152mm	40psi 2.8bar	18.0	450	15	1.0	40	12.2
						21.0	525	15	1.0	35	10.7
						24.0	600	10	0.7	30	9.1
16.5"-24.0" 425-625mm	16.0" 406mm	24.5" 622mm	60.0lbs 27.2kg	Various	40psi 2.8bar	18.0	450	15	1.0	40	12.2
						21.0	525	15	1.0	35	10.7
						24.0	600	10	0.7	30	9.1
16.5"-30.0" 425-775mm	16.0" 406mm	41.0" 1041mm	95.0lbs 43.1kg	Various	40psi 2.8bar	18.0	450	15	1.0	40	12.2
						24.0	600	15	1.0	35	10.7
						30.0	750	10	0.7	30	9.1
22.0"-36.0" 550-950mm	16.0" 406mm	21.5" 546mm	1300 lbs 58.9kg	Various	40psi 2.8bar	24.0	600	15	1.0	40	12.2
						30.0	750	15	1.0	35	10.7
						36.0	900	10	0.7	30	9.1
34.0"-48.0" 850-1250mm	16.0" 406mm	33.0" 838mm	215.0lbs 97.5kg	Various	40psi 2.8bar	36.0	900	10	0.7	25	7.6
						42.0	1050	8	0.6	25	7.6
						48.0	1200	5	0.3	20	6.1
46.0"-60.0" 1150-1550mm	16.0" 406mm	45.0" 1143mm	3250 lbs 147.3kg	Various	40psi 2.8bar	48.0	1200	8	0.6	20	6.1
						54.0	1350	8	0.6	20	6.1
						60.0	1500	5	0.3	15	4.6

Multi-Size Pneumatic Pipe Test Plugs have bypass to enable multiple applications.



400 Series Multi-Size Pipe Test Plugs

400 Series Test Plugs are designed to block or bypass sewage flow as well as conduct a low pressure sewer air test. This range of test plugs can also be used for both line acceptance testing and leak location testing.

Durable rugged aluminium construction

Waste water Bypass/Full FlowThru Sewer Plugs will divert flow during repair or rehabilitation work while keeping your sewer line in service and your work area dry, without the need for continuous pumping.

These plugs can also be used as blank plugs if required by capping off the bypass with a BSP threaded cap or camlock fitting.

Pipe Test Plug uses

- Waste water bypass
- Full flow thru sewer plug
- Low pressure pipe testing
- Line acceptance testing
- Leak location
- Blank off pipelines
- Vacuum testing

High Pressure Plugs

800 SERIES: HIGH PRESSURE PLUGS – 150 PSI TEST

Part Number	Required Inflation Pressure	Max Allowable Back Pressure	Size Range	Diameter	Length
800-4-1	200psi 13.8bar	150psi 10.3bar	3.8"–4.5" 100–125mm	3.5" 89mm	18.0" 457mm
800-6-1	200psi 13.8bar	150psi 10.3bar	5.5"–6.5" 150–175mm	5.0" 127mm	18.0" 457mm
800-8-1	200psi 13.8bar	150psi 10.3bar	7.0"–8.5" 175–225mm	6.5" 165mm	18.0" 457mm
800-10-1	200psi 13.8bar	150psi 10.3bar	9.0"–10.5" 225–275mm	8.0" 203mm	18.0" 457mm
800-12-1	200psi 13.8bar	150psi 10.3bar	11.1"–12.5" 275–325mm	10.0" 254mm	18.0" 457mm
800-15	200psi 13.8bar	150psi 10.3bar	14.0"–15.5" 350–400mm	13.0" 330mm	18.0" 457mm
800-18	200psi 13.8bar	150psi 10.3bar	17.0"–18.5" 425–475mm	16.0" 406mm	18.0" 457mm
800-21	200psi 13.8bar	150psi 10.3bar	20.0"–21.5" 500–550mm	19.0" 483mm	18.0" 457mm
800-24	200psi 13.8bar	150psi 10.3bar	23.0"–24.5" 575–625mm	22.0" 559mm	18.0" 457mm
800-27	200psi 13.8bar	150psi 10.3bar	26.0"–27.5" 650–700mm	25.0" 635mm	18.0" 457mm
800-30	200psi 13.8bar	150psi 10.3bar	29.0"–30.5" 750–800mm	28.0" 711mm	18.0" 457mm
800-33	200psi 13.8bar	150psi 10.3bar	32.0"–33.5" 800–850mm	31.0" 787mm	18.0" 457mm
800-36	200psi 13.8bar	150psi 10.3bar	35.0"–36.5" 900–950mm	34.0" 864mm	18.0" 457mm
800-39	200psi 13.8bar	150psi 10.3bar	38.0"–39.5" 950–1000mm	37.0" 940mm	18.0" 457mm



High Pressure Plugs

- Suitable for high pressure testing
- Available in various sizes
- Higher test pressures available
- Bypass and flow thru options
- Blank off pipelines

Pipeline Testing Accessories



1. Hoses and Gauges



2. Low Pressure Air Test Kit



3. Portable Air Tank



4. Venturi Vacuum



5. Vacuum Manhole Testing Plates



6. Vacuum Pump

1. Hoses and Gauge

All test plugs must be inflated and deflated remotely via a hose.

Shore Hire supplies heavy-duty hand pump and hoses complete with inflation hose and gauge.

The inflation hose must be long enough to allow operator to stay out of danger zone while test plug is being inflated and deflated.

2. Low Pressure Air Test Kit, Pump and Hose

Shore Hire offers a complete range of equipment for air testing including:

- Low Pressure AirTest Kit
- Inflation Hoses and Gauge
- TripleTest Hose
- Hand Pump

3. Portable Air Tank

This lightweight portable air tank supplies air when a compressor is not on hand. Ideal for filling Test Plugs, Monitoring Pressure and other inflatables, this durable steel air tank features a built-in carry handle, an easy-to-read pressure gauge and includes a hose with fittings.

- Pressure gauge
- Built-in carry handle
- Durable steel construction

4. Venturi Vacuum

For vacuum testing of pipelines and manholes. Vacuum testing is the safer method of testing.

Our Venturi Vacuum Pumps are lightweight and easy to use, just connect to a compressor to operate. They do not need oil, gas, or belts and they are very low maintenance. They feature more power, which means faster testing time. A test can be done in minutes.

Two sizes depending on volume to be tested:

- 40 cfm and 27 cfm

(cfm = cubic feet per minute)

5. Vacuum Manhole Testing Plates

Lightweight Aluminium construction.

Vacuum gauge included.

Fits most common circular manhole sizes.

Can be used with either vacuum venturi or vacuum test pump.

Seals on top of manhole.

6. Vacuum Pump

Vacuum tests provide the most efficient, accurate, and cost effective method of testing new, existing, and Rehabilitated Manholes and Pipelines.

Vacuum testing identifies infiltration and exfiltration problems. The vacuum testing system allows you to test Manholes and Pipelines within minutes.

Mounted on a Heavy-duty Aluminium frame with all terrain wheels the Shore Hire Vacuum pump is suitable for onsite conditions.

Pipeline Testing Accessories



7. High Pressure Hydrostatic Testing



8. Pipe Joint Testing



9. Inspection Camera



10. Mechanical Pipe Plugs (sale)



11. Deflection Gauges and Proving Rings



12. Layflat Hose Reel

7. High Pressure Hydrostatic Testing

Can be used to fill pipelines.
Maximum flow of 44 l/s.

For testing of water mains and high pressure rising mains up to 200 psi.

Water tank allows direct mains pressure to be used as the water source.

8. Pipe Joint Testing

Designed to test large diameter precast concrete pipes in-situ.

Allow you to pretest pipes before backfilling.

Fitted with heavy-duty, adjustable wheels for ease of movement within the pipe.

Complete with test panels.

9. Inspection Camera

Shore Hire offers a versatile and expandable system which features industry standard recording and image capture plus a host of innovative new features including reporting software to produce professional reports to be handed to the customer.

10. Mechanical Pipe Plugs

Mechanical plugs can be used in a variety of applications including drain, vent and waste testing and stack testing. Great for small jobs with minimal back pressure.

Steel and plastic plugs are available for sale.

11. Deflection Gauges and Proving Rings

Deflection Gauges and Proving Rings are used to test flexible PVC or plastic sewer pipes for 'out of roundness' or deflection after compaction.

This testing ensures that flexible piping has been properly bedded and backfilled to Australian Standards.

Specifications are generally determined by the relevant water authority.

12. Layflat Hose

Heavy-duty reliable layflat hoses for all purposes complete with male and female camlocks.

SYDNEY BRANCH

360 Edgar Street
Condell Park NSW 2200
sydney@shorehire.com.au
T: 02 8708 1200

NEWCASTLE BRANCH

18 Yilen Close
Beresfield NSW 2322
newcastle@shorehire.com.au
T: 02 4918 2500

MELBOURNE BRANCH

1 Oban Court
Laverton North VIC 3026
melbourne@shorehire.com.au
T: 03 9344 6400

BRISBANE BRANCH

11 Angel Road
Stapylton QLD 4207
brisbane@shorehire.com.au
T: 07 3080 4000

HEAD OFFICE

PO Box CP449
Condell Park NSW 2200
354 Edgar Street
Condell Park NSW 2200
accounts@shorehire.com.au
T: 02 8708 1250

1300 SHORE HIRE**shorehire.com.au****shorehire.**