

## **NEEDLE BEAMS**



## **NEEDLE BEAMS**



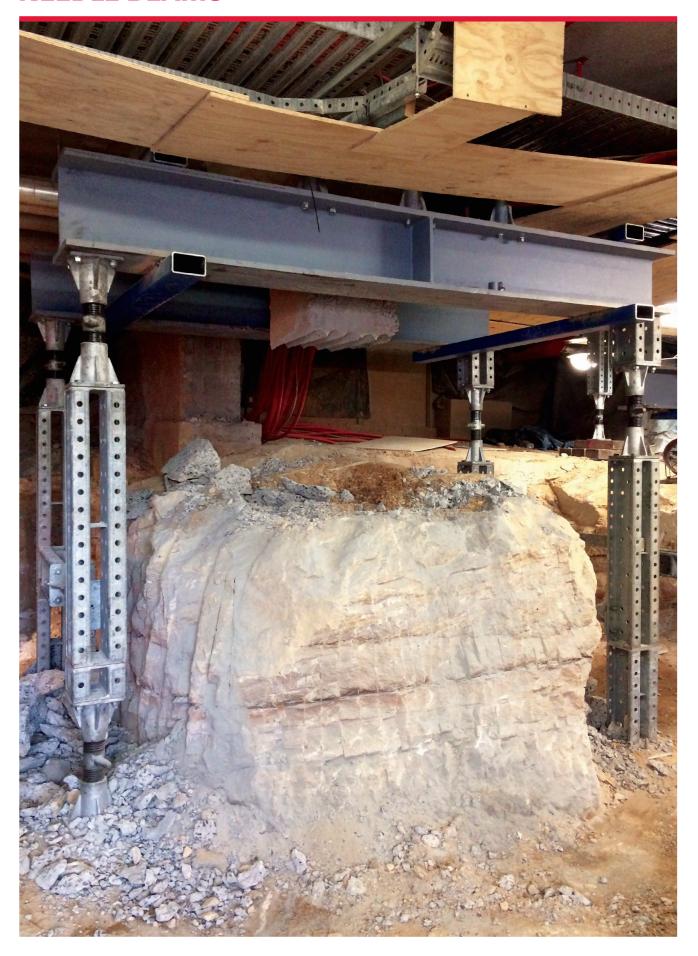

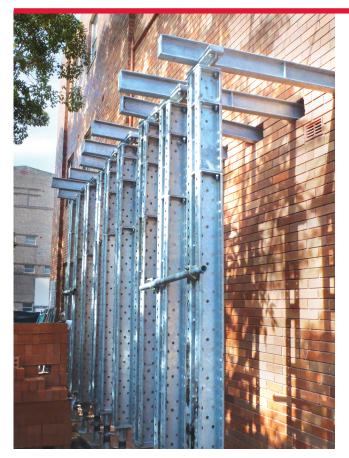

Needle Beams are used in propping and needling applications, and our engineers often specify their use to spread loads whilst supporting slabs. Our needle beams have been reinforced with additional stiffener plates and galvanised for protection.

NEEDLE AND GRILLAGE BEAM SPECIFICATIONS					
					Weight
Туре	Length	Height	Width	Unit Weight	Per Metre
150UB18	2m	155mm	75mm	40kg	18kg
150UB18	3m	155mm	75mm	60kg	18kg
200UB22	2m	202mm	133mm	50kg	22kg
200UB22	3m	202mm	133mm	75kg	22kg
150UC30	2m	158mm	153mm	65kg	30kg
150UC30	3m	158mm	153mm	100kg	30kg
150UC37	2m	162mm	154mm	80kg	37kg
150UC37	3m	162mm	154mm	120kg	37kg
200UC52	2m	206mm	204mm	110kg	52kg
200UC52	3m	206mm	204mm	165kg	52kg
310UC118	2m	315mm	307mm	250kg	118kg
310UC118	3m	315mm	307mm	370kg	118kg
310UC118	4m	315mm	307mm	490kg	118kg

Note: Unit weight greater due to galvanising and flange. We are constantly updating our range so please contact us to see what other sizes we currently carry.